





Expression Fresnel

Intensity Distribution & Illuminance At Distance
SS810SW

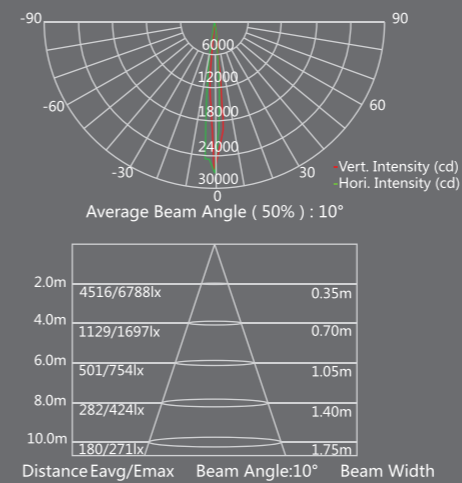

SS810SC

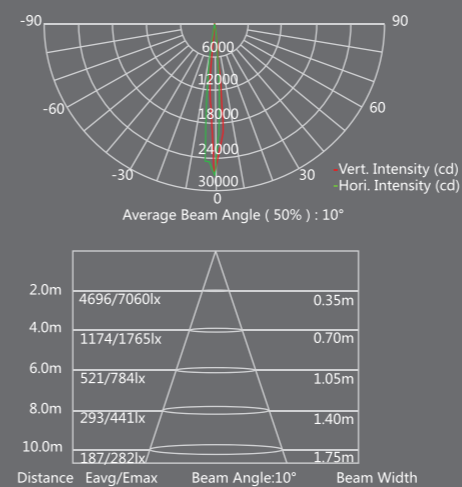


- 100~240VAC
Input Voltage
- On-board Dimmer
- 0~20Hz
Strobe
- DMX512
Control Protocol
- DMX in/out
Power in/out
Fixture Connection
- 0-100%(16-bit)
Dimmer
- Forced convection
Cooling
- CE/cETL
Certification
- 20°~45°
Operation Temperature


Specifications

Model	SS810SW	SS810SC
Msx.Flux	3090lm	3200lm
Peak Intensity	27000cd	28000cd
Color Rendering	> 85Ra	> 85Ra
LED Qty	9PCS	9PCS
Driver Current	3A	3A
Max Power	100W	100W
Control Personality	UNO,DOS,STD.P 1CH2CHS,3CHS	UNO,DOS,STD.P 1CH2CHS,3CHS
Manual Zoom	10°-60°	10°-60°
Color Temperature	3200K±5%	5600K±5%
Dimensions	325.5X281.5X266mm	325.5X281.5X266mm
Weight	5.5kg	5.5kg
Housing	Extruded aluminium	Extruded aluminium
Color	Black	Black
Environment	Dry	Dry

Dimension

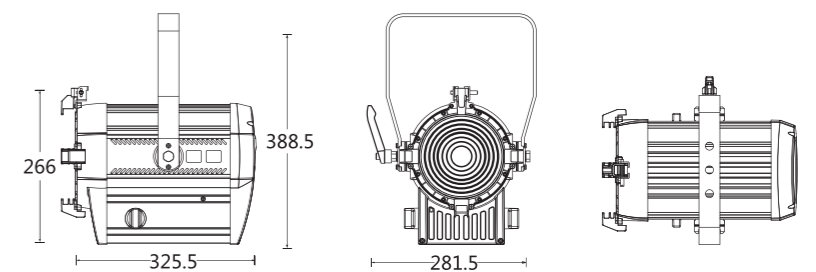

Accessories

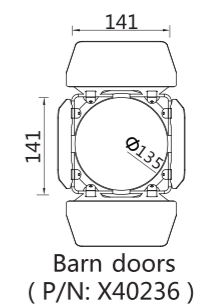

* Accessories not included unless otherwise stated