



SC-Cplayer


FEATURES

- Touch interface, 2Gang (EU version).
- Built-in MP3 player, allows to transmit and save music files via USB or MICRO SD card.
- Built-in amplifier, enables to drive external speaker directly (10W single track).
- AUX input, automatically switch to external output once has AUX input.
- 3 channels PWM output drive 3 ways LED, 380MA per channel, 1.2 A in total (through network line).
- 6 channels DMX output. - Allows to save and play 9 scenes, including the control for built-in Mp3 player and amplifier. (Such as song selection and volume level, etc.).
- 3 ways LED output, 6 channels DMX, the Fade time can be set separately for each scene.
- External Man-body moving-sensor triggers scene output (lighting and music).
- Enables to set the program of playback different scene in different period, the limitative brightness, music volume in specified period, and the fade time of playback or shutdown a scene. - Timing function, each scene can be set to timed start or shut.
- Emergency trigger function (links to the fire alarm contact).
- Infrared remote control.
- Function memory and Power failure protection.
- SC-CplayerBOX and Man-body moving sensor included.

SPECIFICATION

<input type="checkbox"/> POWER SUPPLY	DC24V, 2.5A Min.
<input type="checkbox"/> SPEAKER/CH POWER CONSUMPTION	10W single track
<input type="checkbox"/> OUTPUT	3CH LED (PWM) output, 380mA/CH, Total 1.2 A. 6CH DMX output IR EYE sensor
<input type="checkbox"/> HOUSING	Black Polycarbonate (White, Gray optional)
<input type="checkbox"/> OPERATION TEMPERATURE	0 degC to +35 degC
<input type="checkbox"/> STORAGE TEMPERATURE	-20 degC to +70 degC
<input type="checkbox"/> DIMENSIONS	170(L) x 85(W) x 15.5(H)mm
<input type="checkbox"/> WEIGHT	230g

DIMENSIONS

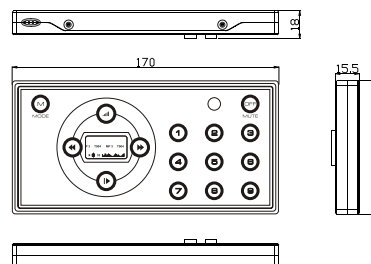

SC-Cplayer

SYSTEM CONNECTION

