

SC-TOUCH 16 D




FEATURES

- Touchpanel interface, 2G
- Black/white housing optional
- Up to 16 Scenes
- On-board Page button for selecting DMX channel 8/16/24/32/40/60
- DMX starting address assignable
- Stand alone mode and on-line mode available
 - In online mode, up to 32 panels can be connected and each panel has individual UID. Through SC-TOUCHmanager, users can use any on-board key to trigger another key on any linked panel.
- Infrared remote control
- Firmware update via USB port
- Power failure memory

SPECIFICATION

<input type="checkbox"/> POWER SUPPLY	DC12-24V
<input type="checkbox"/> CONNECTION	RJ45 port
<input type="checkbox"/> HOUSING	Polycarbonate
<input type="checkbox"/> OPERATION TEMPERATURE	0 degC to +35 degC
<input type="checkbox"/> STORAGE TEMPERATURE	-20 degC to +70 degC
<input type="checkbox"/> DIMENSIONS	170(L) x 85(W) x 15.5(H)mm
<input type="checkbox"/> WEIGHT	250g

DIMENSIONS

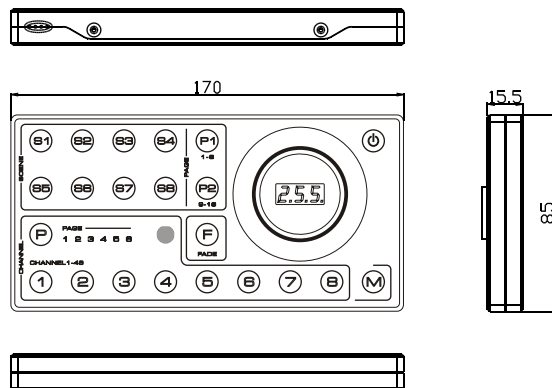

SC-TOUCH 16 D

SYSTEM CONNECTION

