

SC-TOUCHmanager


FEATURES

- Touch panel interface, 2G
- Black/white housing optional
- Auto search of the equipment with individual ID in the ADS system
- In online mode, up to 32 panels can be connected and each panel has individual UID. Through SC-TOUCHmanager, users can use any on-board key to trigger another key on any linked panel.
- Standby mode for energy saving
- LCD display for easy operation

SPECIFICATION

□ POWER SUPPLY	DC12-24V
□ CONNECTION	RJ45 port
□ HOUSING	Polycarbonate
□ OPERATION TEMPERATURE	0 degC to +35 degC
□ STORAGE TEMPERATURE	-20 degC to +70 degC
□ DIMENSIONS	170(L) x 85(W) x 15.5(H)mm
□ WEIGHT	250g

DIMENSIONS

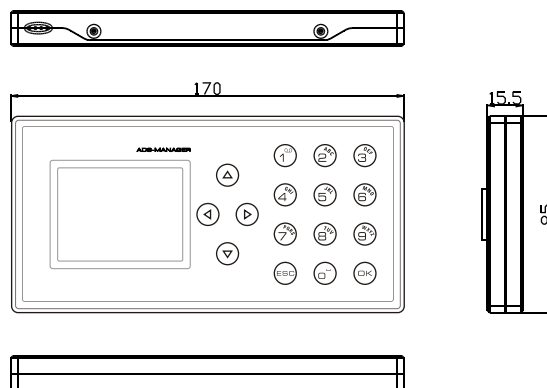

SC-TOUCHmanager

SYSTEM CONNECTION

