

DX-401A

4 Channel DMX Dimmer Pack



Features:

- Two AC inputs. Each output offers 15 output for channel 1 & 2 or channel 3 & 4.
- Self-testing function to test without a console.
- Options of dimming or switch for each channel.
- Tabletop or wall-mounted.

Specifications:

- Power: AC 100-120V / 200-240V, 45-63Hz
- Capacity: 10A per channel (max), total 15A × 2
- Protocol: DMX-512
- Dimension: 220(W) × 270(H) × 85(D) mm
- Weight: 3.2 KG



Installations
Control Panel :



American Type



European Type

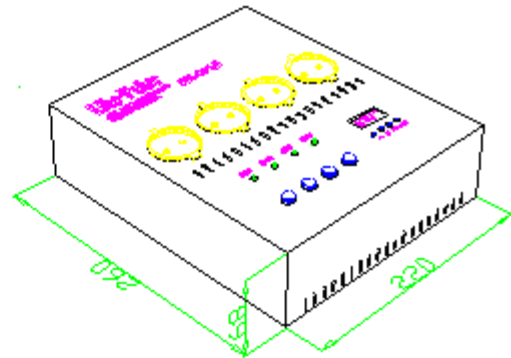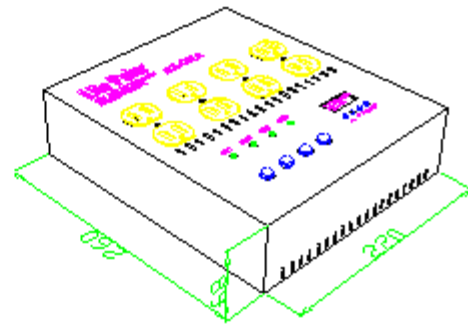

Rear Panel :



Wiring Diagrams

DX-401A has two independent power inputs which supply power to channel 1,2 and channel 3,4. You can use either 3-phase-4-wire or

single-phase-3-wire power. The maximum output for each channel is 10A, for the each set of channel 1,2 and 3,4 is 15A, and 30A for the four channels in total.

